

Isoflex™ - Sectional Overhead Doors

For Quotation Please complete this Quick Quotation Form and Send us.

You can also fill this form online on our website : www.spanker.in

Door Location : Shipping/Receiving Door ANTE Room Door Cooler/Freezer Door

Exterior Door: Exposure to the Wind : Low Average High

Interior Door : Use _____ Temperature : _____

Number of Cycles per Shift : _____ Operation : Motorised Manual Chain Hoist

Used By : Forklift Trucks Staff Trolley Others _____

The type of automatic control desired :


Push Button Pull-Cord Radio Control Magnetic Loop

Photo Cell Radar/IR Sensor Biometric Sensor


Building Structure : RCC Brick Wall PUF PEB Others _____

DIMENSIONAL DETAILS

Millimeters

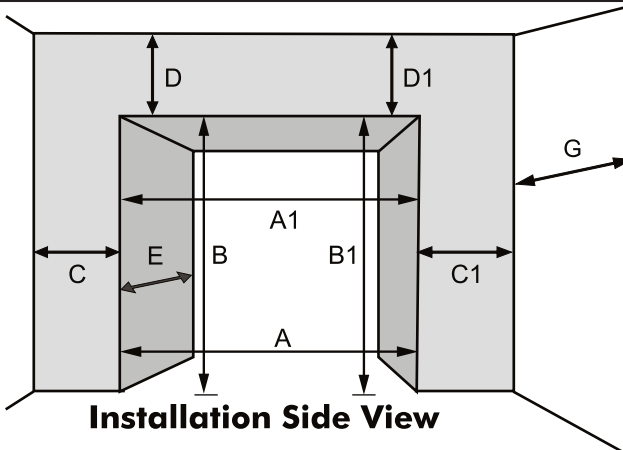

Installation Side View



A	Clear width of opening on Floor Level	
A1	Clear width of opening at Lintel	
B	Clear height of opening LHS	
B1	Clear height of opening RHS	
C	Width of Pillar to which side channel is to be fitted (Clear wall space)	
C1	Width of Pillar to which side channel is to be fitted (Clear wall space)	
D	Distance from Ceiling to underneath Lintel	
D1	Distance from Ceiling to underneath Lintel	
E	Thickness of Pillar	
F	Thickness of Lintel	
G	Side wall (OR distance to wall opposite to doorway.)	

Please Indicate Any Specific Requirements :

State Any Obstruction To Door Fixing (window, joist, pipe, etc.)

(Please illustrate on diagram above)

Power Supply : Distance from opening : _____
Voltage available : _____ Phase : _____

Optional Extras :

Panel Thickness : 40 mm 60 mm 80 mm

Windows Required : Traffic Light

Interlocking Flashing Light

Other : Specify : _____

Your Name : _____

Designation : _____

Company : _____

Address : _____

Phone : _____

Email : _____

spanker yes, your entrance specialist

SPANKER INTERNATIONAL PVT. LTD.
27, Gopi Estate, B/h. Spice World, Changodar, Ahmedabad - 382213. INDIA
+91 99099 63333, +91 92280 06632 to 35 (4 Lines)
sales@spanker.in | www.spanker.in